## **Uniform Mitigation Verification Inspection Form**

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 1/08/23							
Owner Information							
Owner Name:				Contact Person:			
Addres	ss:4032-4036 CORKWOOD CT			Home Phone:			
City:P	ALM HARBOR	Zip:	34684	Work Phone:			
County	PINELLAS			Cell Phone:			
	nce Company:	·		Policy #:			
Year o	f Home: 1983	# of Stories: 1		Email:			
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
the □ □ □ 2. <b>Ro</b> OR	a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)//						
COV	vering identified.  2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	No Information Year of Original Installation or Provided for Replacement Compliance			
	✓ 1. Asphalt/Fiberglass Shingle	11,09,23		2024			
	2. Concrete/Clay Tile	//					
	3. Metal						
	4. Built Up						
	5. Membrane				_		
	6. Other						
	installation OR have a roofing B. All roof coverings have a M roofing permit application after C. One or more roof coverings	coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a mit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. nore roof coverings do not meet the requirements of Answer "A" or "B".					
	of Deck Attachment: What is the weakest form of roof deck attachment?						
3. <u><b>Ko</b></u>	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.  B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of						
24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.  ☑ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/r 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less the Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is sometimes and the system of screws in the fieldOR- Dimensional decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less the Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is sometimes. SB Property Address 4032-4036 CORKWOOD CT, PALM HARBOR, FL, 3468					spaced a maximum of ber/Tongue & Groove inches in width)OR-		
Inspec	tors Initials <u>SB</u> Property A	Address <u>4032-4036</u> C	ORKWOOD CT, PALM	HAKBOK, FL, 34684			

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155  $Page\ 1\ of\ 4$ 

		or greater real 182 psf.	sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
		•	ed Concrete Roof Deck.
			ed Concrete Roof Beek.
			n or unidentified.
		G. No attic :	
4.	5 fe	eet of the insid	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within le or outside corner of the roof in determination of WEAKEST type)
		A. Toe Nail	
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mir	nimal conditi	ons to qualify for categories B, C, or D. All visible metal connectors are:
		<b>!</b>	
			Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.
	V	B. Clips	
		✓	Metal connectors that do not wrap over the top of the truss/rafter, or
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
		C. Single W	
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D. Double V	Wraps
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		E. Structura	Anchor bolts structurally connected or reinforced concrete roof.
		F. Other: _	
		G. Unknow	n or unidentified
		H. No attic	access
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of e over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.
		B. Flat Root	Total length of non-hip features: 638 feet; Total roof system perimeter: feet
			less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof areasq ft
	Ø	C. Other Ro	of Any roof that does not qualify as either (A) or (B) above.
6.	_	A. SWR (all sheathing dwelling	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the g or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.
		B. No SWR	n or undetermined.
	_	C. UIIKIIUWI	in or undetermined.
Ins	spec	tors Initials <u>s</u>	Property Address 4032-4036 CORKWOOD CT, PALM HARBOR, FL, 34684

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. <u>Opening Protection</u>: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure		N/A	N/A	N/A			
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
N	Opening Protection products that appear to be A or B but are not verified							
IN	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	Х				Х	Х	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

No. Classical and in the fall of the fall

☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

in the table above

A.I. All Non-Glazed openings classified as A in the table above, of no Non-Glazed openings exist
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed
openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices
in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following
for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
● ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
● SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X

C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with

□ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 □ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above
 Inspectors Initials Property Address

 4032-4036 CORKWOOD CT, PALM HARBOR, FL, 34684

plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	quirements of Answer "A", "B", or C" or sy	tation) All Glazed openings are protected with ystems that appear to meet Answer "A" or "B"			
•	<u> </u>				
_		Non-Glazed openings classified as Level X in the			
☐ N.3 One or More Non-Glazed openings is	classified as Level X in the table above				
☑ X. None or Some Glazed Openings Or	ne or more Glazed openings classified and	Level X in the table above.			
	TIONS MUST BE CERTIFIED BY A QUA a Statutes, provides a listing of individuals				
Qualified Inspector Name: Shaun Bernstein	License Type: Building	License or Certificate #: CBC1250088			
Inspection Company:	Building	Phone:			
Sunshine Builders of Tampa LLC		813-971-5003			
Qualified Inspector – I hold an active	<del></del>				
training approved by the Construction Industry	14, Florida Statutes who has completed the statu Licensing Board and completion of a proficien				
Building code inspector certified under Section					
General, building or residential contractor licer					
Professional engineer licensed under Section 4	•				
Professional architect licensed under Section 48					
Any other individual or entity recognized by th verification form pursuant to Section 627.711(2)	ne insurer as possessing the necessary qualification 2), Florida Statutes.	ions to properly complete a uniform mitigation			
Individuals other than licensed contractors l					
under Section 471.015, Florida Statutes, mus					
Licensees under s.471.015 or s.489.111 may a experience to conduct a mitigation verification		ses the requisite skill, knowledge, and			
Chaum Damatain					
(print name)	fied inspector and I personally performe	ed the inspection or (ucensea			
contractors and professional engineers only)		) perform the inspection e of inspector)			
and I agree to be responsible for his/her wo	•	e of hispector)			
Qualified Inspector Signature: Shaun Ber	rnstein Digitally signed by Shaun Bernstein Date: 2024.01.22 10:42:09-05'00' Date:				
An individual or entity who knowingly or th	arough gross negligence provides a false	or fraudulent mitigation verification form is			
subject to investigation by the Florida Divisi	ion of Insurance Fraud and may be subj	ect to administrative action by the			
appropriate licensing agency or to criminal					
certifies this form shall be directly liable for performed the inspection.	the misconduct of employees as if the au	uthorized mitigation inspector personally			
Homeowner to complete: I certify that the					
residence identified on this form and that proof of identification was provided to me or my Authorized Representative.					
Signature: Date:					
An individual or entity who knowingly prov	ides or utters a false or fraudulent mitig	ation verification form with the intent to			
obtain or receive a discount on an insurance of the first degree. (Section 627.711(7), Flori	premium to which the individual or ent				
The definitions on this form are for inspection as offering protection from hurricanes.	on purposes only and cannot be used to o	certify any product or construction feature			
Inspectors Initials SB_Property Address4	1032-4036 CORKWOOD CT, PALM HA	ARBOR, FL, 34684			
*This verification form is valid for up to five inaccuracies found on the form.	e (5) years provided no material changes	s have been made to the structure or			

## Shaun Bernstein

Watertight Roofing Services
1/11/2024 | 19 Photos



## 4032-4036 CORKWOOD CT

## Section 1



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/8/2024, 11:38am Creator: Maynor Perez



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/8/2024, 11:38am Creator: Maynor Perez

3



Project: STRATHMORE GATE - 4032 - 4036 CORKWOOD CT / 2310 - 5005581 - 01

Date: 1/10/2024, 3:19pm Creator: Hector Reyes

4



Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:19pm Creator: Hector Reyes

5



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:19pm Creator: Hector Reyes

6



Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:21pm Creator: Hector Reyes

7



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:21pm Creator: Hector Reyes


8



Project: STRATHMORE GATE - 4032 - 4036 CORKWOOD CT / 2310 - 5005581 - 01

Date: 1/10/2024, 3:21pm Creator: Hector Reyes



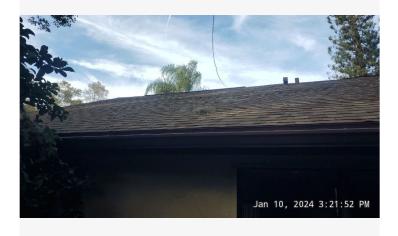

Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:21pm Creator: Hector Reyes

10



Project: STRATHMORE GATE - 4032 - 4036 CORKWOOD CT / 2310 - 5005581 - 01

Date: 1/10/2024, 3:21pm Creator: Hector Reyes


11



Project: STRATHMORE GATE - 4032 - 4036 CORKWOOD CT / 2310 - 5005581 - 01

Date: 1/10/2024, 3:28pm Creator: Hector Reyes

12

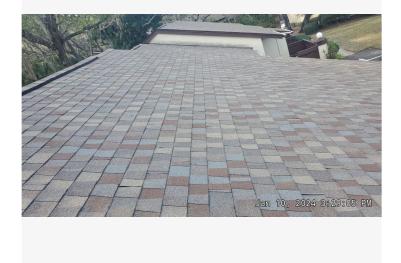

Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:29pm Creator: Hector Reyes


13



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:29pm Creator: Hector Reyes

14

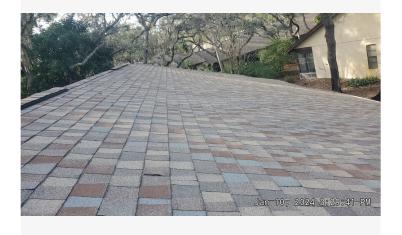

Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:29pm Creator: Hector Reyes

15



Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:30pm Creator: Hector Reyes


16



Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:30pm Creator: Hector Reyes

17

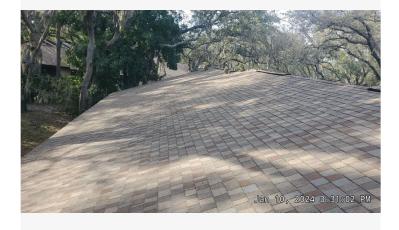

Project: STRATHMORE GATE -4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:31pm Creator: Hector Reyes

18



Project: STRATHMORE GATE-4032-4036 CORKWOOD CT / 2310-5005581-01

Date: 1/10/2024, 3:32pm Creator: Hector Reyes

19



Project: STRATHMORE GATE - 4032 - 4036 CORKWOOD CT / 2310 - 5005581 - 01

Date: 1/10/2024, 3:33pm Creator: Hector Reyes