Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 10/25/23						
Owner Information						
Owner	Name:				Contact Person:	
Addres	ss:4020-4030 DIAMOND LEAF CO			Home Phone:		
City:P	ALM HARBOR	Zip:	34684	Work Phone:		
County	7:PINELLAS			Cell Phone:		
	nce Company:	·		Policy #:		
Year o	f Home: 1983	# of Stories: 1		Email:		
accom	: Any documentation used in va pany this form. At least one pho 17. The insurer may ask addition	tograph must accompa	any this form to validat	te each attribute marked	l in questions 3	
	a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)//					
V	C. Unknown or does not meet the	requirements of Answer	er "A" or "B"			
OR	of Covering: Select all roof cover Year of Original Installation/Replyering identified.					
	Pe 2.1 Roof Covering Type:	rmit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance	
	☑ 1. Asphalt/Fiberglass Shingle	0 ₁ 10 ₂ 3		2023		
	2. Concrete/Clay Tile					
	_					
	_					
	_					
	A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a					
	roofing permit application after 9	/1/1994 and before 3/1/2	2002 OR the roof is original	inal and built in 1997 or l	ater.	
	C. One or more roof coverings do	•		3".		
	D. No roof coverings meet the re-	quirements of Answer ".	A" or "B".			
3. Ro	of Deck Attachment: What is the	weakest form of roof de	eck attachment?			
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.					
	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					
2	C. Plywood/OSB roof sheathing 24"inches o.c.) by 8d common n decking with a minimum of 2 na Any system of screws, nails, adh	ails spaced a maximum ls per board (or 1 nail pesives, other deck faster	of 6" inches in the field per board if each board is ning system or truss/raft	OR- Dimensional lumbs s equal to or less than 6 in er spacing that is shown	er/Tongue & Groove nches in width)OR-	
Inspec	Inspectors Initials SB Property Address 4020-4030 DIAMOND LEAF CT, PALM HARBOR, FL, 34684					

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

		or greater re 182 psf.	sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
		•	ed Concrete Roof Deck.
			ed Collecte Roof Beek.
			n or unidentified.
		G. No attic	
4.	5 fe	eet of the insid	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within de or outside corner of the roof in determination of WEAKEST type)
		A. Toe Nail	
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mir	nimal conditi	ons to qualify for categories B, C, or D. All visible metal connectors are:
		!	
		Ø	
	V	B. Clips	
		V	Metal connectors that do not wrap over the top of the truss/rafter, or
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
		C. Single W	
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D. Double V	Wraps
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		E. Structura	Anchor bolts structurally connected or reinforced concrete roof.
		F. Other: _	<u> </u>
		G. Unknow	n or unidentified
		H. No attic	access
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of e over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A. Hip Roo	f Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.
	_	B. Flat Room	Total length of non-hip features: 638 feet; Total roof system perimeter: feet
			less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	V	C. Other Ro	of Any roof that does not qualify as either (A) or (B) above.
6.	_	A. SWR (al sheathing dwelling	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the g or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.
		B. No SWR	n or undetermined.
		C. Unknow	n or undetermined.
Ins	spec	tors Initials <u>s</u>	SB Property Address 4020-4030 DIAMOND LEAF CT, PALM HARBOR, FL, 34684
		• • • • •	

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

-	Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure		N/A	N/A	N/A			
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
N	Opening Protection products that appear to be A or B but are not verified							
IN	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	Х				Х	Х	

J	A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
	a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
	system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
	and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

in the table above

A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above					
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above					
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed					
openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection device					
in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following					
for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):					
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)					
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)					
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)					
☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist					

B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X

☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above			
C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with			
plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).			
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist			
C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in			
the table above			

Inspectors Initials Property Address 4020-4030 DIAMOND LEAF CT, PALM HARBOR, FL, 34684

C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	quirements of Answer "A", "B", or C" or s	Atation) All Glazed openings are protected with systems that appear to meet Answer "A" or "B"			
☐ N.1 All Non-Glazed openings classified a					
_	N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the				
☐ N.3 One or More Non-Glazed openings is	s classified as Level X in the table above				
☑ X. None or Some Glazed Openings Or	ne or more Glazed openings classified and	Level X in the table above.			
	TIONS MUST BE CERTIFIED BY A QUA a Statutes, provides a listing of individual				
Qualified Inspector Name: Shaun Bernstein	License Type: Building	License or Certificate #: CBC1250088			
Inspection Company:	Dulluling	Phone:			
Sunshine Builders of Tampa LLC		813-971-5003			
Qualified Inspector – I hold an active					
Home inspector licensed under Section 468.83 training approved by the Construction Industry	Licensing Board and completion of a proficier				
Building code inspector certified under Section					
General, building or residential contractor licer					
Professional engineer licensed under Section 4					
Professional architect licensed under Section 4					
Any other individual or entity recognized by the verification form pursuant to Section 627.711(2)	ne insurer as possessing the necessary qualificat 2), Florida Statutes.	tions to properly complete a uniform mitigation			
Individuals other than licensed contractors					
under Section 471.015, Florida Statutes, mu					
Licensees under s.471.015 or s.489.111 may experience to conduct a mitigation verificati		ses the requisite skill, knowledge, and			
Chaum Damatain					
(print name)	ified inspector and I personally perform	ed the inspection or (ucensea			
contractors and professional engineers only)) perform the inspection			
and I agree to be responsible for his/her wo	•	e of inspector)			
Qualified Inspector Signature: Shaun Ber		14/23			
An individual or entity who knowingly or th	rough gross negligence provides a false	or fraudulent mitigation verification form is			
subject to investigation by the Florida Divisi					
appropriate licensing agency or to criminal	prosecution. (Section 627.711(4)-(7), Flo	orida Statutes) The Qualified Inspector who			
certifies this form shall be directly liable for performed the inspection.	the misconduct of employees as if the ar	uthorized mitigation inspector personally			
Homeowner to complete: I certify that the	named Qualified Inspector or his or har ar	nnlovae did perform an inspection of the			
residence identified on this form and that proof					
Signature: Date:					
An individual or entity who knowingly prov	vides or utters a false or fraudulent mitig	gation verification form with the intent to			
obtain or receive a discount on an insurance of the first degree. (Section 627.711(7), Flori		tity is not entitled commits a misdemeanor			
The definitions on this form are for inspections of the form of th	on purposes only and cannot be used to	certify any product or construction feature			
Inspectors Initials SB Property Address 4020-4030 DIAMOND LEAF CT, PALM HARBOR, FL, 34684					
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.					

Shaun Bernstein

Watertight Roofing Services 11/14/2023 | 17 Photos



STRATHMORE GATE - 4020-4030 DIAMOND LEAF CT

Section 1



Project: 4030 Diamond Leaf Ct Date: 10/25/2023, 3:47pm Creator: Lucio Roofer

2



Project: 4030 Diamond Leaf Ct Date: 10/25/2023, 3:47pm Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/27/2023, 1:19pm Creator: Hector Reyes

4



Project: 4030 Diamond Leaf Ct Date: 10/25/2023, 3:49pm Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/25/2023, 3:49pm Creator: Lucio Roofer

6



Project: 4030 Diamond Leaf Ct Date: 10/25/2023, 3:51pm Creator: Lucio Roofer




Project: 4030 Diamond Leaf Ct Date: 10/26/2023, 12:22pm Creator: Lucio Roofer

8




Project: 4030 Diamond Leaf Ct Date: 10/26/2023, 12:22pm Creator: Lucio Roofer

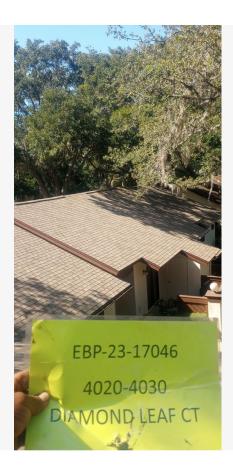

Project: 4030 Diamond Leaf Ct Date: 10/26/2023, 12:22pm Creator: Lucio Roofer

10

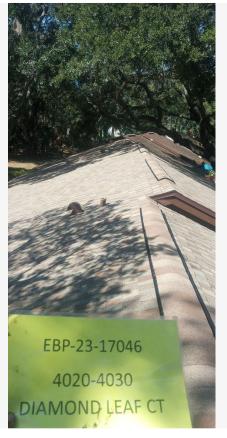

Project: 4030 Diamond Leaf Ct Date: 10/26/2023, 12:22pm Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/27/2023, 1:19pm Creator: Hector Reyes

12



Project: 4030 Diamond Leaf Ct Date: 10/27/2023, 1:19pm Creator: Hector Reyes



Project: 4030 Diamond Leaf Ct Date: 10/23/2023, 11:08am Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/23/2023, 3:49pm Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/23/2023, 11:09am Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/24/2023, 11:50am Creator: Lucio Roofer



Project: 4030 Diamond Leaf Ct Date: 10/24/2023, 11:50am Creator: Lucio Roofer